



DESCRIPTION

The PT32U301 microcontrollers is a series of low-power microcontrollers incorporating a high-performance ARM CortexTM-M0 32-bit RISC core. It operates at a maximum 48 MHz frequency and features 32 Kbytes of Flash and 4 Kbytes of SRAM. A comprehensive set of power-saving modes allows it to be employed in low-power applications. Extensive range of enhanced peripherals and I/Os are available allowing the device to be adopted in different application. A comprehensive set of power-saving modes allows it to be employed in low-power applications. The Flash program memory can be reprogrammed in-system through the SWD interface.


The PT32U301 MCUs give you any essential functionality as a General-purpose MCU. With its highly customizable peripherals, it eases the process of making your own ideal product.

PT32U301 microcontroller peripheral set also includes an External Bus Interface, 2x UARTs, 1X I2C, 1 SPI, 3x general-purpose 16/32-bit timers, an RTC, 3x PWM, an ADC and four analog comparators.

FEATURES

- ARM Cortex M0 Processor
- Performance up to 48 MHz
- Flash memory 32K-Byte
- System SRAM 4K-Byte
- Power control
 - POR/PDR
 - PVD
- Low power mode
 - Sleep mode
 - Stop mode
 - Standby mode
- Divers Peripherals
 - Up to 45 GPIOs
 - 16/32-bit timer * 6
 - WDT/RTC
 - 8 channel 12-bit ADC
 - 4 Comparator with window comparison
 - 2 UART
 - I2C with master/slave mode
 - SPI with variable bit length (4-16 bits)

BLOCK DIAGRAM

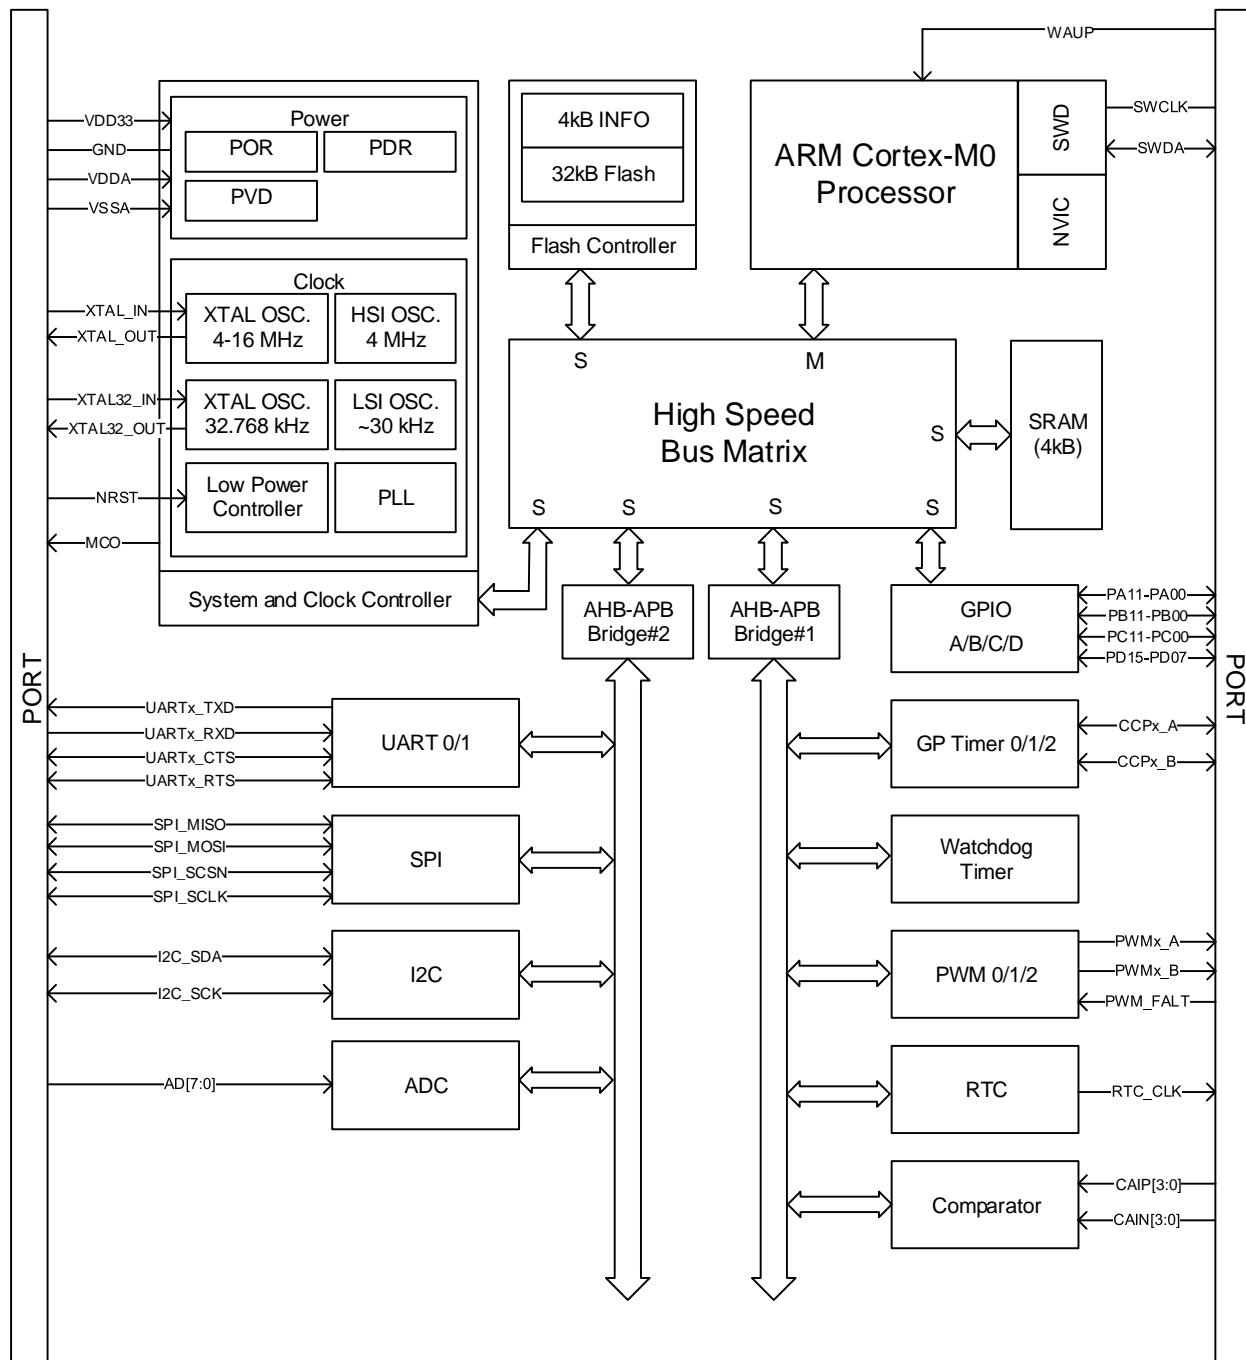

CONTENT

DESCRIPTION	1
FEATURES	1
BLOCK DIAGRAM	2
CONTENT	3
1. ORDER INFORMATION	5
2. PIN CONFIGURATION	6
3. PIN DESCRIPTION	9
3.1 MULTIPLEXING PINS FUNCTION SELECTION	11
3.2 SIGNAL DESCRIPTION	12
4. FUNCTIONAL DESCRIPTION	14
4.1 SYSTEM AND MEMORY OVERVIEW	14
4.1.1 PT32U301 Memory Mapping	15
4.2 ARM® CORTEX™-M0 CORE	17
4.2.1 CPU System Timer Control Register (SYST)	17
4.2.2 SYST Register Maps	18
4.2.3 CPU Nested Vectored Interrupt Controller (NVIC)	20
4.2.4 Vector Table	22
4.2.5 Operation Description	22
4.2.6 NVIC Register Maps	22
4.3 CPU SYSTEM CONTROL	33
4.3.1 CPU System Control Register Map	33
4.4 SYSTEM CONTROL (SC)	38
4.4.1 Functional Description	38
4.4.2 System Control Register Map	44
4.5 FLASH CONTROLLER (FC)	70
4.5.1 Memory Organization	70
4.5.2 Flash Controller Clocking Frequency	70
4.5.3 Flash Programming/Erasing	71
4.5.4 Flash Controller Register Map	71
4.6 GENERAL PURPOSE I/O (GPIO)	74
4.6.1 Block Diagram	74
4.6.2 Functional Description	75
4.6.3 General-Purpose Input/Output Register Map	79
4.7 UNIVERSAL ASYNCHRONOUS RECEIVER/TRANSMITTER (UART)	88
4.7.1 Block Diagram	89
4.7.2 Functional Description	90
4.7.3 UART Register Map	96
4.8 PULSE WIDTH MODULATION (PWM)	115
4.8.1 PWM Block Diagram	116
4.8.2 PWM Signal Generator Block Diagram	117
4.8.3 PWM Functional Description	118
4.8.4 PWM Register Map	124
4.9 ANALOG TO DIGITAL CONVERTER (ADC)	155
4.9.1 Block Diagram	156
4.9.2 Functional Description	157
4.9.3 Initialization and Configuration	159
4.9.4 ADC Register Map	160
4.10 GENERAL PURPOSE TIMERS (GPT)	188
4.10.1 Block Diagram	189
4.10.2 Functional Description	189
4.10.3 GPTM Initialization and Configuration	196
4.10.4 General-Purpose Timer Register Map	200

4.11 ANALOG COMPARATOR (AC)	215
4.11.1 <i>Block Diagram</i>	215
4.11.2 <i>Functional Description</i>	216
4.11.3 <i>Comparator Register Map</i>	217
4.12 WATCH DOG TIMER (WDT).....	226
4.12.1 <i>Block Diagram</i>	226
4.12.2 <i>Operating Flowchart</i>	227
4.12.3 <i>Functional Description</i>	228
4.12.4 <i>WDT Register Map</i>	228
4.13 REAL TIME CLOCK (RTC).....	234
4.13.1 <i>Block Diagram</i>	234
4.13.2 <i>Function Description</i>	235
4.13.3 <i>RTC Register Map</i>	237
4.14 INTER INTEGRATED CIRCUIT (I2C)	257
4.14.1 <i>Block Diagram</i>	258
4.14.2 <i>Functional Description</i>	259
4.14.3 <i>I2C Register Map</i>	266
4.15 SERIAL PERIPHERAL INTERFACE (SPI)	286
4.15.1 <i>Block Diagram</i>	287
4.15.2 <i>SPI Function Description</i>	288
4.15.3 <i>SPI Programming Model</i>	301
4.15.4 <i>SPI Register Map</i>	304
5. ELECTRICAL CHARACTERISTICS.....	321
5.1 MAXIMUM RATINGS	321
5.2 OPERATING CONDITIONS.....	321
5.3 I/O PIN CHARACTERISTICS	321
5.4 ON-CHIP LOW DROP-OUT (LDO) REGULATOR CHARACTERISTICS	322
5.5 PHASE LOCKED LOOP CHARACTERISTICS	322
5.6 POWER-ON RESET CHARACTERISTICS.....	323
5.7 NRST CHARACTERISTICS	324
5.8 8 MHz XTAL CHARACTERISTICS	325
5.9 4 MHz RCOSC CHARACTERISTICS	326
5.10 32 KHz XTAL.....	327
5.11 TEMPERATURE SENSOR CHARACTERISTICS	327
5.12 ADC+ PGA CHARACTERISTICS	328
5.12.1 <i>Recommended operating conditions</i>	328
5.12.2 <i>DC accuracy</i>	328
5.12.3 <i>Timing specification (refer to timing chart)</i>	328
5.12.4 <i>PGA Characteristics</i>	329
5.13 COMPARATOR CHARACTERISTICS	329
5.14 RCOSC_32K CHARACTERISTICS	329
5.15 POWER CONSUMPTION TABLE.....	330
6. PACKAGE INFORMATION	331
REVISION HISTORY	338



1. ORDER INFORMATION

Valid Part Number	Package Type	Top Code
PT32U301	LQFP 48	PT32U301 HGMA
PT32U301	LQFP 32	PT32U301 HGWA
PT32U301	SSOP 24	PT32U301 HCPA
PT32U301	SOP 16	PT32U301 HXLA
PT32U301	SOP 8	PT32U301 HXBA

