

DESCRIPTION

The PT2811 is an integrated 3W stereo Class-D amplifier with audio processor. The input selector supports 3 Single-Ended and 1 Fully-Differential input can be chose. The highly integration of the audio processor and class-D amplifier can further reduce external components BOM and provides better audio experience. All of functions are controlled via I2C bus.


APPLICATIONS

- PC/Video Projector
- Portable media player
- Audio duck system
- Flat panel display with audio inputs


FEATURES

- Supply Voltage: 3~6V
- 3W X 2 Class-D power amplifier (VDD=5V, RL=4Ω)
- 1 Fully-Differential input
- 3 Single-Ended audio inputs
- Programmable input gain from 0 to +15dB
- Bass and Treble control
- Master volume in 1dB/step from 0 to -79dB
- Advanced soft-mute and multiple soft-step volume technology eliminate audible click during volume and input sources changing.
- Built-in RF noise filter
- Shutdown function for power saving
- Over temperature and over current protection
- Controlled by I²C interface
- Available in 48 Pins, LQFP package

block diagram

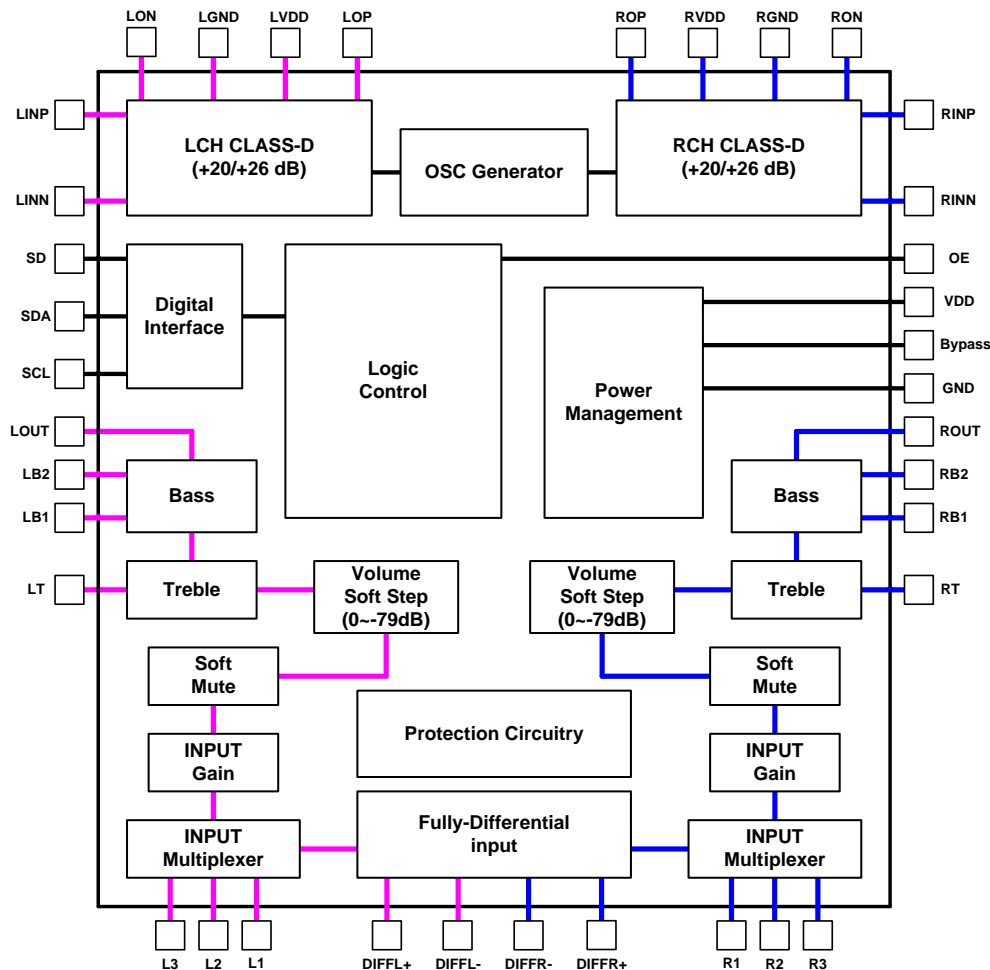

APPLICATION CIRCUIT

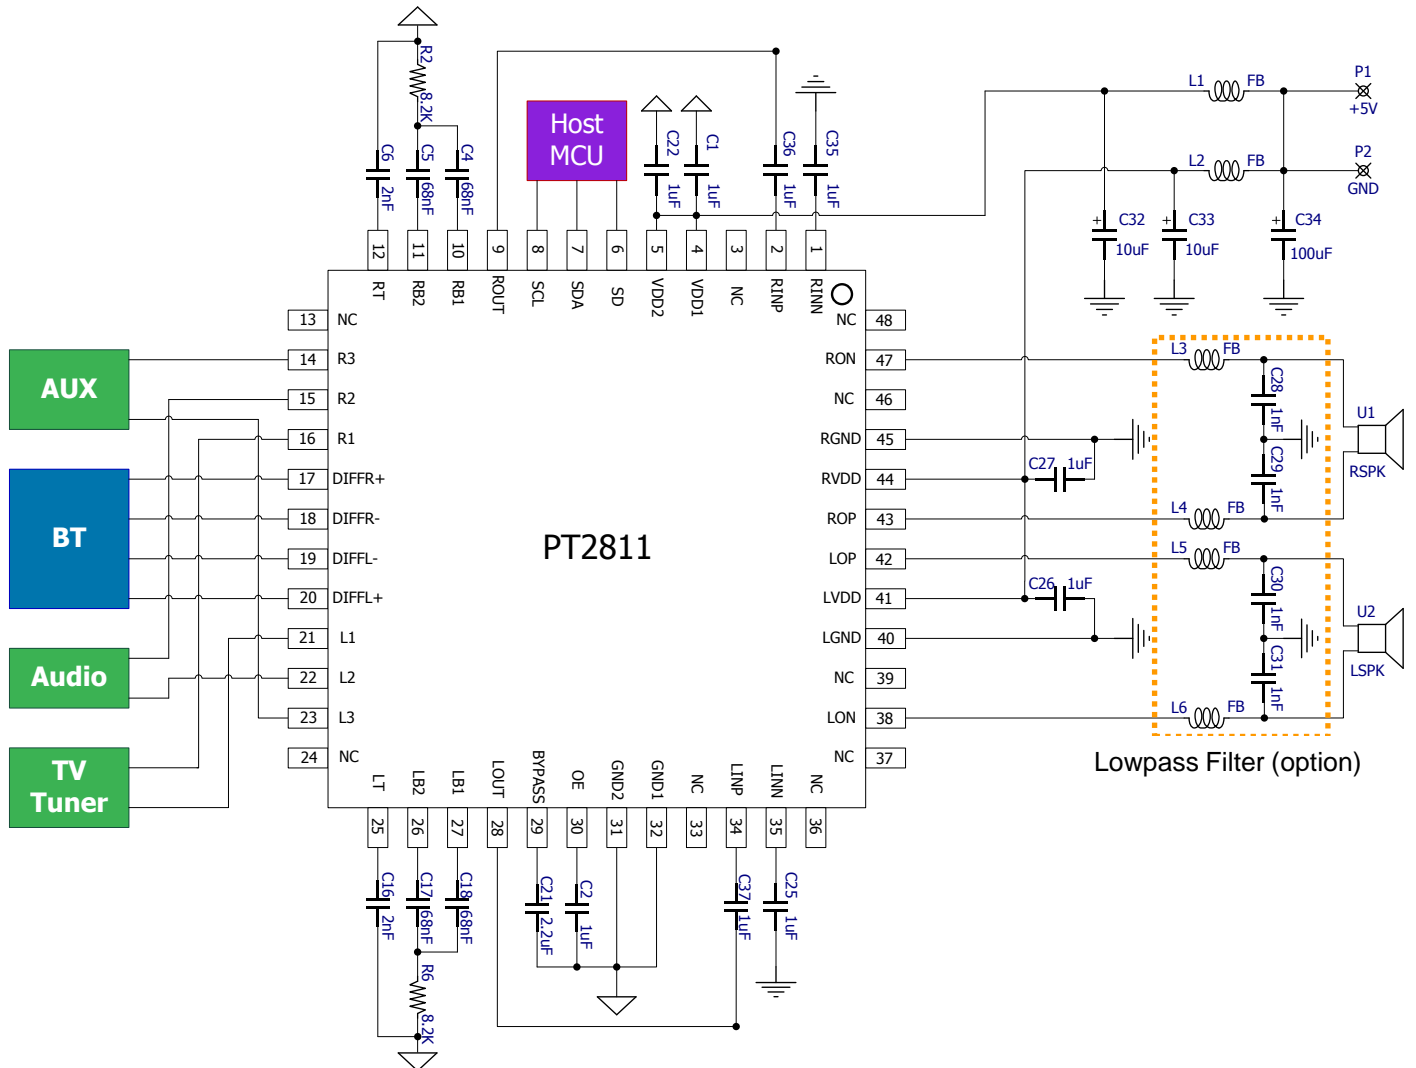


BT=Bluetooth module with fully differential output.

The ferrite bead lowpass filter is an optional item; it is useful to reduction the EMI emission.

ORDER INFORMATION

Valid Part Number	Package Type	Top Code
PT2811-LQ	48 Pins, LQFP, 7 X 7 mm	PT2811-LQ

PIN CONFIGURATION

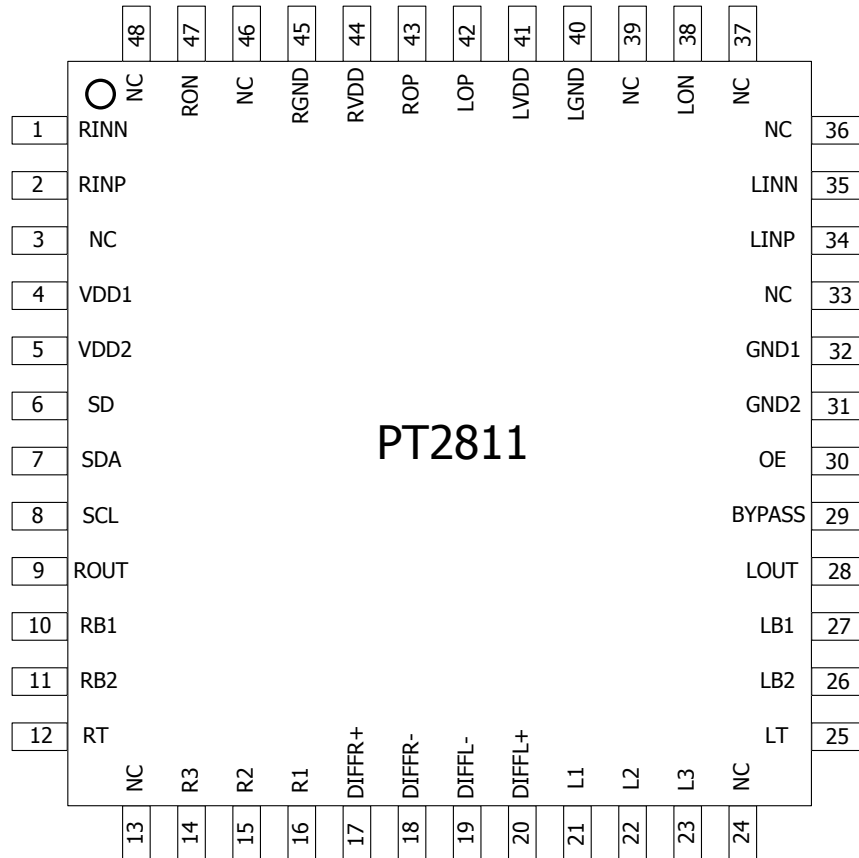



PIN DESCRIPTION

Pin Name	I/O	Description	Pin No.
RINN	I	Negative input of right channel Class-D amp	1
RINP	I	Positive input of right channel Class-D amp	2
NC	-	No connection	3
VDD1	P	Power input for internal circuits	4
VDD2	P	Power input for internal circuits	5
SD	I	Shutdown control pin. Sets to "logic-low" will turn off whole chip and pull up to "logic-high" to back to normal operation.	6
SDA	I	I ² C bus data input	7
SCL	I	I ² C bus clock input	8
ROUT	O	Right channel line out	9
RB1	I	Capacitor 1 for right channel Bass controller	10
RB2	O	Capacitor 2 for right channel Bass controller	11
RT	I	Capacitor for right channel Treble controller	12
NC	-	No connection	13
R3	I	Input 3 of right channel	14
R2	I	Input 2 of right channel	15
R1	I	Input 1 of right channel	16
DIFFR+	I	Differential right channel "+" input	17
DIFFR-	I	Differential right channel "-" input	18
DIFFL-	I	Differential left channel "-" input	19
DIFFL+	I	Differential left channel "+" input	20
L1	I	Input 1 of left channel	21
L2	I	Input 2 of left channel	22
L3	I	Input 3 of left channel	23
NC	-	No connection	24
LT	I	Capacitor for left channel Treble controller	25
LB2	O	Capacitor 2 for left channel Bass controller	26
LB1	I	Capacitor 1 for left channel Bass controller	27
LOUT	O	Left channel line out	28
BYPASS	P	Bypass cap for Internal Voltage Reference, a 2.2 μ F cap is recommended.	29
OE	I	Output Enable setting, connect a 0.22 μ F cap to GND.	30
GND2	P	Ground	31
GND1	P	Ground	32
NC	-	No connection	33
LINP	I	Positive input of left channel Class-D amp	34
LINN	I	Negative input of left channel Class-D amp	35
NC	-	No connection	36
NC	-	No connection	37
LON	O	Negative output of left channel Class-D amp	38
NC	-	No connection	39
LGND	P	Power ground of left channel Class-D amp	40
LVDD	P	Power input of left channel Class-D amp	41
LOP	O	Positive output of left channel Class-D amp	42
ROP	O	Positive output of right channel Class-D amp	43
RVDD	P	Power input of right channel Class-D amp	44
RGND	P	Power ground of right channel Class-D amp	45
NC	-	No connection	46
RON	O	Negative output of right channel Class-D amp	47
NC	-	No connection	48

IMPORTANT NOTICE

Princeton Technology Corporation (PTC) reserves the right to make corrections, modifications, enhancements, improvements, and other changes to its products and to discontinue any product without notice at any time.

PTC cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a PTC product. No circuit patent licenses are implied.

Princeton Technology Corp.
2F, 233-1, Baociao Road,
Sindian Dist., New Taipei City 23145, Taiwan
Tel: 886-2-66296288
Fax: 886-2-29174598
<http://www.princeton.com.tw>